

Since the usage and finishing of the product is not under our control, we accept no liability for the success of the work and can therefore only guarantee the nature of our products as per the accompanying product data sheets and in accordance with our general terms and conditions of sale. The properties listed here represent no guarantee with respect to the eventual use of our products. We reserve the right to make changes due to technical advances. Any other technical information given in the course of a consultation must be confirmed in writing. Colours shown here are restricted by the printing techniques and may differ from those exhibited by the products themselves. We also reserve the right to make alterations to the product technology or design. Only the current version of this data sheet is valid. Such versions are accessible by anyone via the internet. The issue of the latest data sheet invalidates all those that have been published beforehand.




TI-BOARD

1/2

Prefabricated shower board in composite material for flush or low profile installation

- Information Sheet -

DURAL

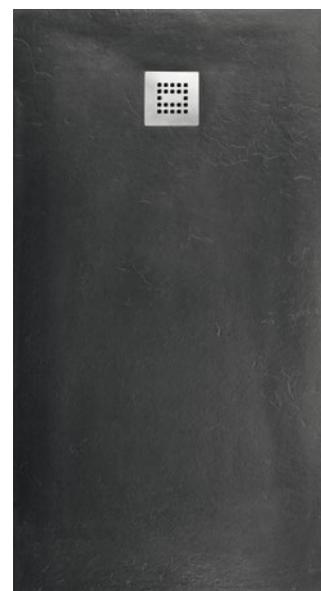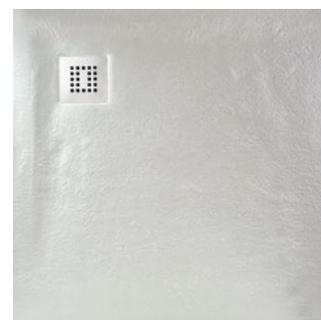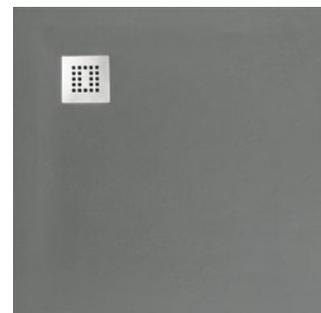

APPLICATION:

For bathroom renovation and new builds, the prefabricated TI-BOARDS from DURAL combine an attractive design with easy and straightforward installation for barrier-free showers. Manufactured from composite material (natural stone and synthetic resin) which is fully permeated with colour, they fit harmoniously within the surrounding environment. The shower boards are only 2.8 cm thick, which means very little preparation is required before they can be installed on practically any flat and load-bearing subsurface. Even flush (barrier-free) installation is easy. You won't find a better way to build a shower area!

Stylish, durable, and easy to clean

The high quality of the composite material and the natural stone it contains are the first things you will notice about TI-BOARD from Dural, which is available in white, grey and anthracite. A stylish structure within the surface provides outstanding anti-slip properties, but still allows for hygienic cleaning. A high quality gel coating seals the pores, preventing the ingress of bacteria and discolouration due to UV light and fulfils the most stringent hygiene requirements. The drain siphon unit is easy to clean after removing the elegant, stainless steel grating, guaranteeing a perfect appearance that lasts a lifetime. And if the surface is ever damaged, it can be repaired quick and easily using the repair kit (available as an option).

Strong and adaptable

In comparison with conventional shower boards in mineral cast, TI-BOARD from DURAL is up to 50 % lighter. The boards are manufactured as a single piece and are completely waterproof. The integral slope channels the waste water efficiently into the powerful siphon unit, which is also connected easily and securely to the shower board. The right-angled edges simplify fitting of the board to walls and floors. Even assembly of a shower partition or screen is simple thanks to the flat borders.

DURAL GmbH

Südring 11

D-56412 Ruppach-Goldhausen

Tel. +49 (0) 2602/9261-0

Fax +49 (0) 2602/9261-50

info@dural.com



Prefabricated shower board in composite material for flush or low profile installation

- Information Sheet -

INSTALLATION:

1. The sub-floor must be clean, dry, load-bearing and absolutely level. If the sub-floor is uneven, the shower board can warp.
2. Fit the drain siphon supplied with the TI-BOARD in the intended position and connect it to the waste water pipe. Make sure that a minimum slope of 1 % is in place and test the system for possible leaks.
3. Apply waterproof adhesive tape to the entire wall area.
4. To affix the shower board securely, apply strips of a polyurethane adhesive (Sicaflex, Ceys etc.) to the sub-floor.
5. Lightly coat the underside of the TI-BOARD with the chosen adhesive and fit the board in the final installation position. Check that the drain opening and the waste water pipe are aligned.
6. Make sure that the board is levelled correctly to avoid any problems with water runoff.
7. Seal edges using neutral silicone.

PLEASE NOTE:

Please refer to our detailed installation instructions which are available online at www.dural.com.

The generally recognized rules of good tiling practice must always be observed!

The following applies to all products / materials: please check any mechanical stresses or chemical's which the boards maybe exposed to, prior to installation.



PRODUCT DATA:

MATERIAL:	Composite material made of natural stone and synthetic resin, imbued with colour
DIMENSIONS:	90 x 90 x 2,8cm; 23 kg 90 x 120 x 2,8 cm; 28 kg
COLOURS:	white, grey, anthracite
SLOPE / RUN-OFF:	Integrated 4-sided slope, single point drainage, DN 40 connection, drain capacity 52 litres / minute
OTHER:	Slip resistance: DIN 51130: Class B; UNE ENV 12633:2033 Class 2

DURAL GmbH
Südring 11
D-56412 Ruppach-Goldhausen
Tel. +49 (0) 2602/9261-0
Fax +49 (0) 2602/9261-50
info@dural.com